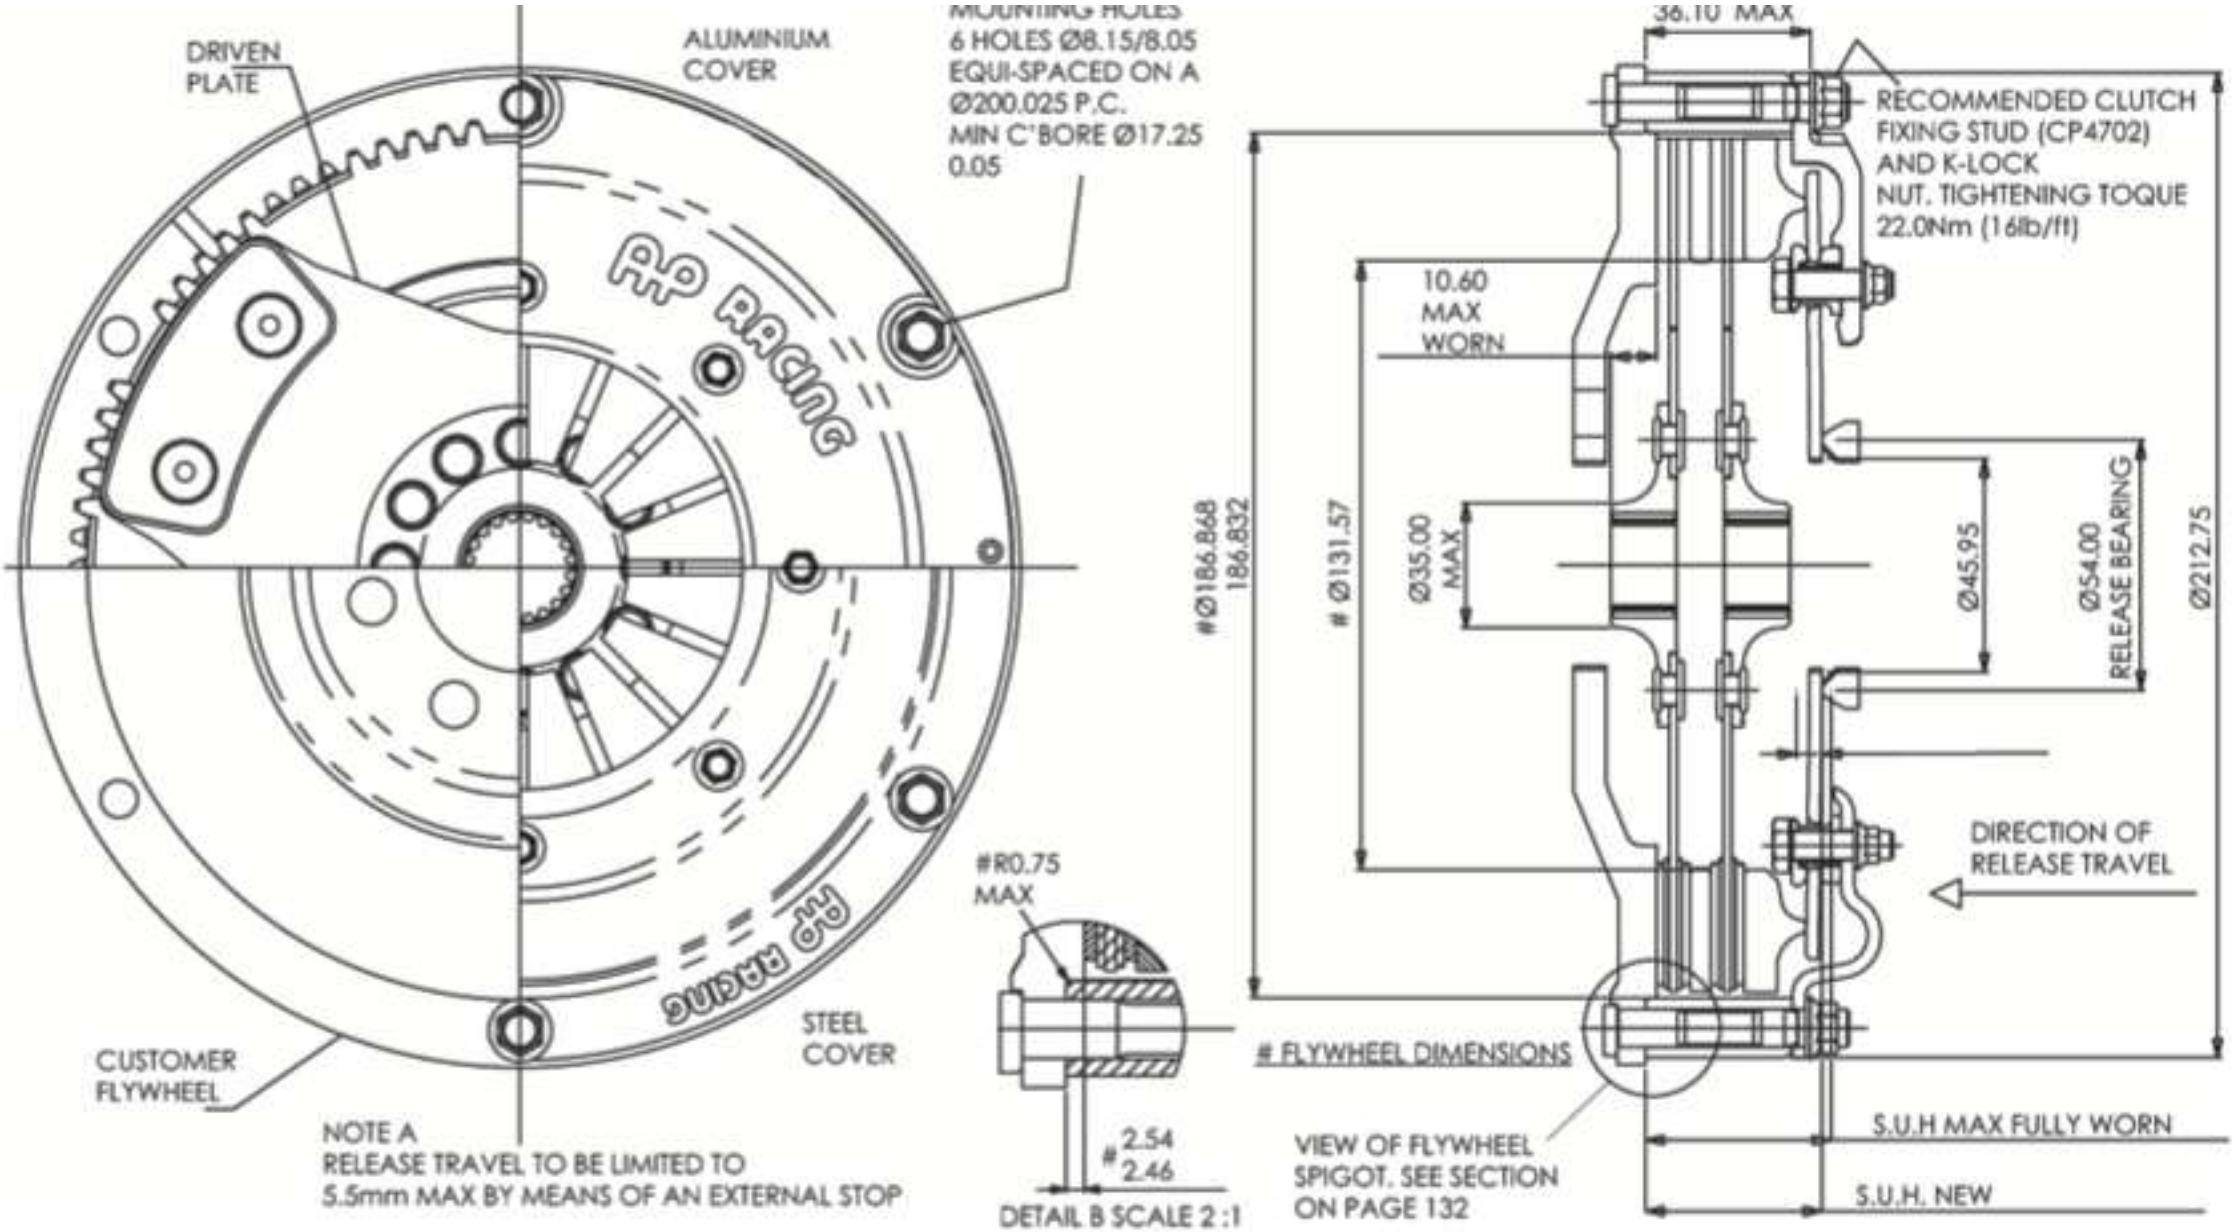
DRIVEN PLATE
ALUMINIUM COVER
MOUNTING HOLES
6 HOLES Ø8.15/8.05
EQUI-SPACED ON A
Ø200.025 P.C.
MIN C'BORE Ø17.25
0.05
RACING
CUSTOMER FLYWHEEL
STEEL COVER
NOTE A
RELEASE TRAVEL TO BE LIMITED TO
5.5mm MAX BY MEANS OF AN EXTERNAL STOP
#R0.75
MAX
2.54
2.46
DETAIL B SCALE 2 :1
36.10 MAX
RECOMMENDED CLUTCH
FIXING STUD (CP4702)
AND K-LOCK
NUT. TIGHTENING TOQUE
22.0Nm (16lb/ft)
10.60
MAX
WORN
#Ø186.868
186.832
Ø131.57
Ø35.00
MAX
Ø45.95
Ø54.00
RELEASE BEARING
Ø212.75
DIRECTION OF
RELEASE TRAVEL
FLYWHEEL DIMENSIONS
VIEW OF FLYWHEEL
SPIGOT. SEE SECTION
ON PAGE 132
S.U.H MAX FULLY WORN
S.U.H. NEW