


BRUSHED AXIAL FANS

VA08-AP71-/LL-53A

Performance curve

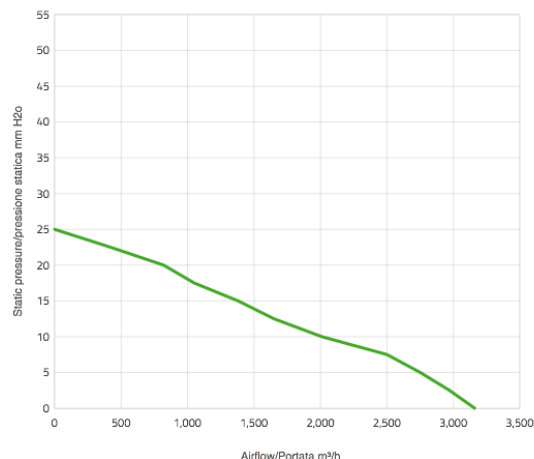

Performance chart

Static pressure	Airflow	Current input	Airflow	Static pressure
mm H2O	m³/h	A	CFM	in H2O
0	3160	19.5	1864	0
2.5	2970	20.1	1752	0.1
5	2750	20.5	1623	0.2
7.5	2500	20.5	1475	0.3
10	2010	19.6	1186	0.4
12.5	1650	18.7	974	0.5
15	1380	19.1	814	0.6
17.5	1050	19.8	620	0.7
20	820	21.1	484	0.8

This is a not-controlled copy electronically created from the web site www.spalautomotive.com. The information contained herein is subject to change without notice. This catalogue/web site does not imply that any such parts are available for supply. The publisher and any party associated with the production of this catalogue/web site do not accept any responsibility or liability whatsoever (to the extent permitted by law) for any inaccuracy, error, misinformation or misleading statements, whether negligently caused or otherwise, contained in this publication. This publication is protected by copyright and may not be reproduced or copied (using any method of reproduction or copying), sold, transmitted, circulated or otherwise forwarded to third parties, in whole or part, without prior written consent of the author.

Static pressure	Airflow	Current input	Airflow	Static pressure
22.5	420	21.4	248	0.9
25	0	21.5	0	1

